

SALES & ENGINEERING DATA

RATIO
SERIES: **3:1**


FLUID P.S.I.
RANGE: **60 - 300**

PH10A-XSS-XXT

1" HIGH PRESSURE METALLIC DIAPHRAGM PUMP

RELEASED: 7-7-00
REVISED: 6-10-10
(REV. F) S-1193

DIMENSIONAL DATA

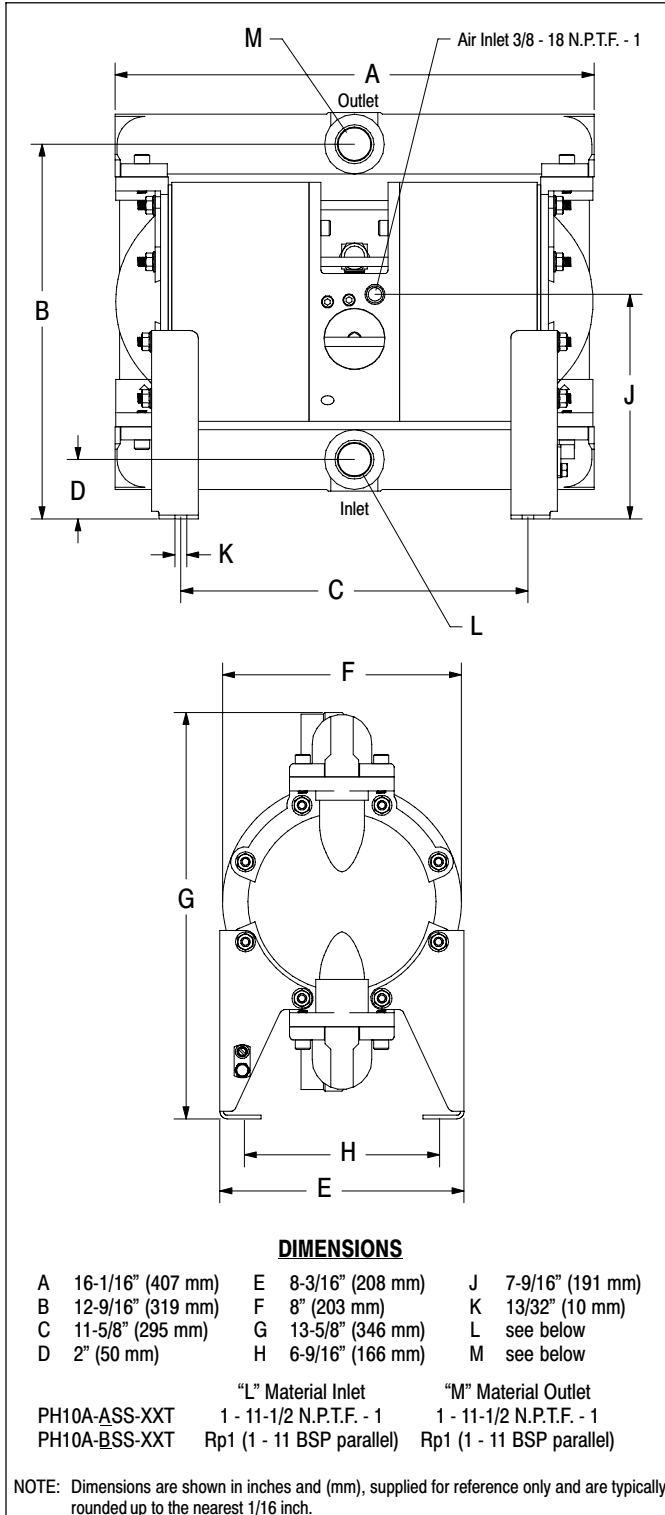

SPECIFICATIONS

CONSTRUCTION

Model Series	PH10A-XSS-XXT
Pump Type	Metallic, Air Operated, High Pressure, Double Diaphragm
Ratio	3:1
Material Inlet / Outlet (female)	
models PH10A-ASS-XXT	1 - 11-1/2 N.P.T.F. - 1
models PH10A-BSS-XXT	Rp1 (1 - 11 BSP parallel)
Air Inlet	3/8 - 18 N.P.T.F. - 1
Air Exhaust	3/8 - 18 N.P.T.F. - 1
Weight	94.73 lbs (42.97 kgs)
Air Section Service Kit	637338
Fluid Section Service Kit	
models PH10A-XSS-XHT	637339-1
models PH10A-XSS-XST	637339

PERFORMANCE

Air Inlet Pressure Range	20 - 100 p.s.i. (1.4 - 6.9 bar)
Fluid Pressure Range	60 - 300 p.s.i. (4.1 - 20.7 bar)
Maximum Flow Rate (flooded inlet)	26 g.p.m. (98.4 l.p.m.)
Maximum Particle Size	1/8" dia. (3.2 mm)
Maximum Temperature Limits (diaphragm / ball / seal material)	
Nitrile	10° to 180° F (-12° to 82° C)
PTFE	40° to 225° F (4° to 107° C)
Displacement / Cycle @ 100 p.s.i.	0.06 gal. (0.23 lit.)
Noise Level @ 70 p.s.i. - 60 c.p.m.①	84.5 db(A)②

Notes:

① Tested with 93110 muffler installed.

② The pump sound pressure level has been updated to an Equivalent Continuous Sound Level (L_{Aeq}) to meet the intent of ANSI S1. 13-1971, CAGI-PNEUROP S5.1 using four microphone locations.

ACCESSORIES:

67142 Wall Mount Bracket

airpumping.co.uk

est. 1979

Unit 16, Upminster Trading Park, Warley St., Upminster, Essex, RM14 3PJ, ENGLAND

ARO

IR Ingersoll Rand
Industrial Technologies

PERFORMANCE CURVES

PH10A-XSS-XT 1" HIGH PRESSURE METALLIC DIAPHRAGM PUMP

